4G LTE MONOPOLE ANTENNA



4G LTE, 90-degree positioned antenna with 2dBi gain

TECHNICAL FEATURES

Technology: GSM / UMTS / LTE

Frequency: 820–960 MHz; 1710–2170 MHz; 2500-2700 MHz

Impedancy: 50 OhmPolarization: Linear

• Beam angle: H 360° V 30°

Gain: 2dBiVSWR: <4.36:1

Rotation: 90° degree, fixed position


Mount: SMA-M


· IP rating: IP65, ABS case

Dimensions: 50 x 10 mm (with SMA base: 50 x 16.6 mm)

Weight: 6 gr

Operating temperature: from -40°C to +85°C

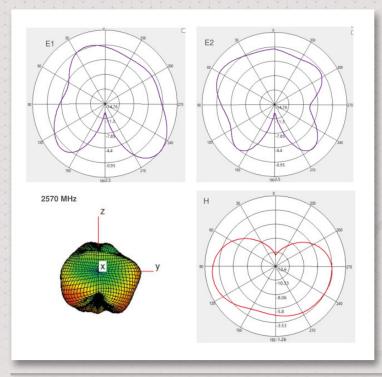

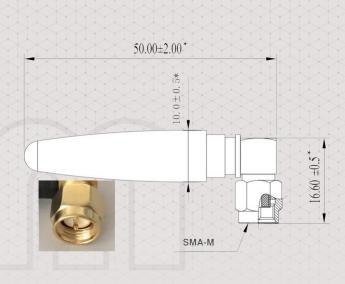

The presented images on the datasheet are for illustration purposes only. The details on the data sheet are for general information purposes only. WM Systems LLc cannot be held liable for erroneous information on the datasheet. The announced information are subject to change without notice. For more details, please contact us.

WM Systems LLC

8 Villa str., Budapest, H-1222 HUNGARY

Phone: +36 (1) 310 7075

Support: +36 (20) 333 1111