
MAGNETIC MOUNT WITH SYSTEMS

Magnetic mount LTE antenna with 3dBi gain and SMA connector

TECHNICAL FEATURES

- Technology: GSM / UMTS / LTE
- Frequency: 690-960MHz, 1710-2700MHz
- Impedancy: 50 Ohms
- Polarization: Vertical
- Directivity: Omni directional
- Gain: 3 dBi
- VSWR: < 2.0 : 1
- Max Input power: 50 W
- Cable: RG174/U type, 3 meters long
- Connector: SMA male
- Attachment: Magnetic base
- Dimensions: 110 x 30mm / 20gr
- Operating temperature: from -40°C to +90°C

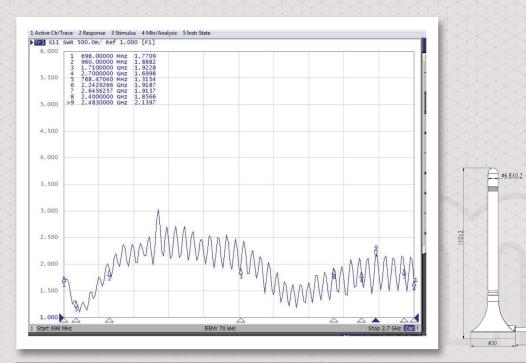

The presented images on the datasheet are for illustration purposes only. The details on the data sheet are for general information purposes only. WM Systems LLc cannot be held liable for erroneous information on the datasheet. The announced information are subject to change without notice. For more details, please contact us.

WM Systems LLC 8 Our website: www.wmsystems.hu

8 Villa str., Budapest, H-1222 HUNGARYPhone: +36 (1) 310 7075uSales inquiry: intersales@wmsystems.huSales inquiry: intersales@wmsystems.hu

5 Support: +36 (20) 333 1111 Support: **support@wmsystems.hu**