## **MAGNETIC MOUNT W** LTE ANTENNA



Magnetic mount LTE antenna with 6dBi gain and FME connector

## **TECHNICAL FEATURES**

Technology: GSM / UMTS / LTE

Frequency: 700/800/900/1700/1800/1900/2100/2600 MHz

Impedancy: 50 Ohms Polarization: Vertical

Directivity: Omni directional

Gain: 6 dBi VSWR: < 2.0:1

Max Input power: 10 W Beam angle: H 360°, V 30°


Cable: RG174/U type, 3 meters long

Connector: FME male


Attachment: Magnetic base

Dimensions: 315 x 29.5 mm / 56gr

Operating temperature: from -40°C to +85°C

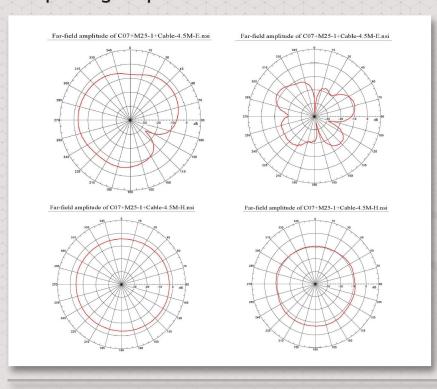



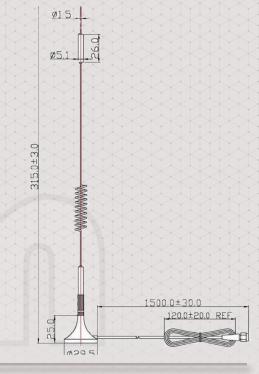

The presented images on the datasheet are for illustration purposes only. The details on the data sheet are for general information purposes only. WM Systems LLc cannot be held liable for erroneous information on the datasheet. The announced information are subject to change without notice. For more details, please contact us.

Sales inquiry: intersales@wmsystems.hu

Phone: +36 (1) 310 7075