

WM-E1S SL7000



Cellular modem specifically designed for the Itron SL7000 electricity meters

UPGRADE THE MODEMS NOT THE SMART METERS!

All around the world mobile operators are shutting down 2G/3G networks in order to give way to 5G. Companies that operate smart meters with 2G/3G connectivity must plan the migration to the latest 4G LTE network which is well-positioned to dominate smart metering communication technologies in the upcoming years. The migration from GSM / UMTS to LTE has many advantages, for example, a shorter readout time due to the high-speed network with low latency.


Utilities have two options for migration: replace the meters or upgrade the modems! The 1st option comes with a high CAPEX, while the 2nd option is a future-proof solution that reduces TCO.

Our company develops a cellular modem that work smoothly and is fully compatible with different models. This device was designed to be fully compliant the with 3-phase Itron® SL7000 electricity meters.

Our cellular modems represent a future-proof migration solution to the LTE network with the same functionality, on higher data speed. Configuration and firmware updates can be done remotely, minimizing the need for costly site visits.

This external modem can be mounted on DIN-rail and connected to the meter through an RJ45 cable. The modem can be configured to “push” the read out the data (current consumption, event log, load profile) from the connected meter and send it to the HES periodically via Internet (by using an APN) at the pre-programmed intervals. Data sending can be also triggered by an alarm (e.g. power outage, cover removal event).

The modem can be accessed remotely through the cellular network. The modem can also read or modify certain parameters of the meter remotely via WM-E Term® configuration software.

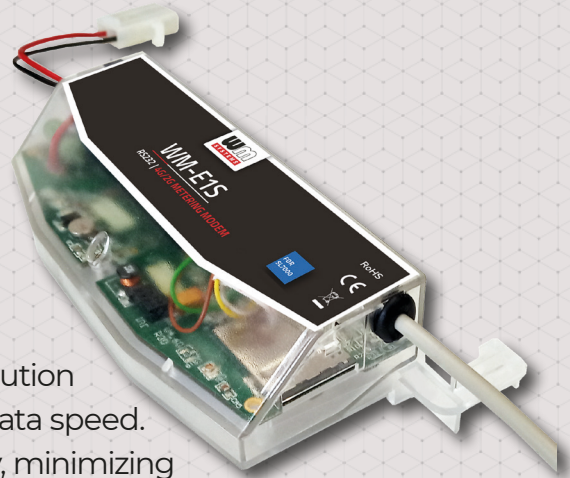

MAIN FEATURES

- Cellular module options: LTE Cat.1 / 3G/2G, LTE Cat.M / Cat.NB / 2G
- External modem in a compact design (separated from the meter)
- It can be fastened securely by its DIN-rail adapter
- AC power supply from the meter's mains connector (by 57/100V AC phase voltage or 230/400V AC line voltage)
- RS232 / RS485 meter connection (RJ45)
- Compatibility with Itron® SL7000 electricity meter
- IEC 62056-21 protocol, transparent mode, CSDATA call
- Optional „push” mode (FTP, IEC or SMS triggered)
- Supercapacitor option (for power outage), LastGASP notification
- Remote & safe firmware updates, WM-E Term® configuration tool
- Device Manager® software (order option)

APPLICATION

- UTILITY COMPANIES
- SMART METERING
- INDUSTRIAL MEASUREMENT



WM-E1S SL7000



DESIGN AND OUTFIT

- External modem, compact design (separated from meter)
- It can be fastened securely by its DIN-rail adapter
- RS232 / RS485 interface (1m long RJ45 cable for the meter connection / modem configuration)
- AC power by meter via pigtail connector (57.7 / 100V phase voltage or 230/400V line voltage)
- External SMA antenna interface (50 Ohm)

COMPATIBILITY


- Itron® SL7000 electricity meters

OPERATION

- IEC 62056-21 protocol, transparent data transmission
- „Push” mode (FTP or IEC sending, SMS triggered)
- CSDData call, TLS encryption (optional)
- Immediate alarm SMS notification (LastGASP power loss)

ACCESSORIES (ORDER OPTIONS)

- External SMA antenna (50 Ohm)
- 35mm DIN-rail adapter (by anodized aluminum with spring steel wire)
- Supercapacitor (for LastGASP SMS notification in case of power outage, status changes)
- WM-E Term® software (mass FW updates, actualization of settings)
- You can manage the device by Device Manager® software

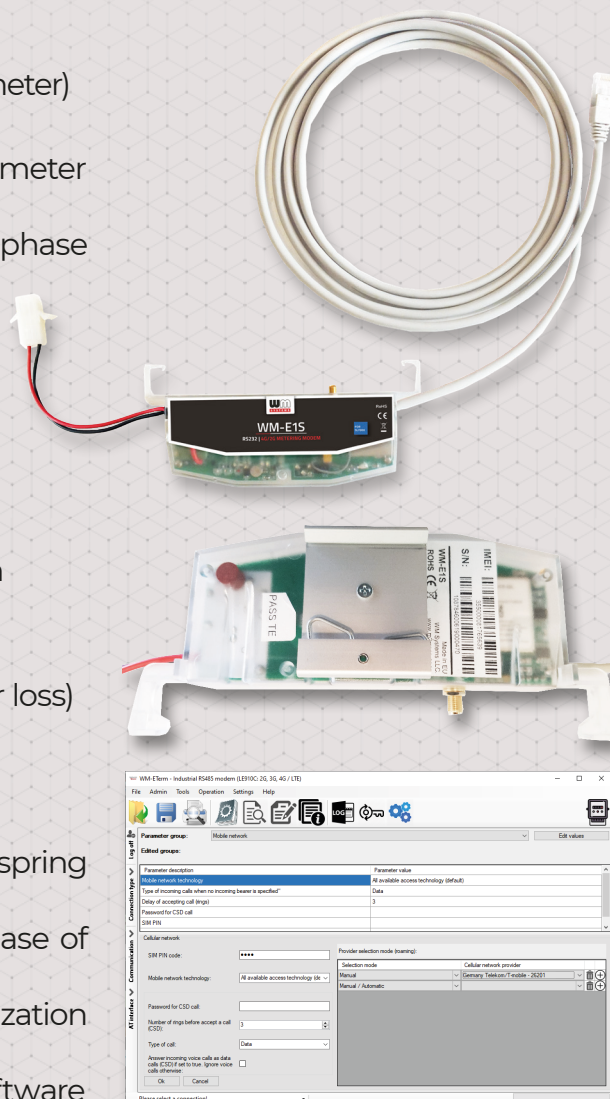

WM-E1S SL7000*		LTE Cat.1		LTE Cat.M / Cat.NB		
Power	Voltage	100-240V AC (57.7-100V AC phase voltage or 100-240V AC line voltage) ±15%/-15%, 50-60Hz ±1/5%				
	Current/ Consumption	Stand by current: 24mA @ 100V, 12mA @ 240V Average current: 30mA @ 100V, 15mA @ 240V Maximal current: 0.15A				
Communication module	Cellular technology	- LTE Cat.1 - 3G/2G "fallback"		- LTE Cat.M / Cat.NB		- LTE Cat.M / Cat.NB - 2G "fallback"
	Internet module	- Telit LE910C1-EUX	- Telit LE910S1-EA	- Telit ME910C1-E1	- Telit ME910C1-W1	- Telit ME910C1-WW
	Bands / Frequency (MHz)	- LTE-FDD: B1(2100) / B3(1800) / B7(2600) / B8(900) / B28A(700) - 3G: B1(2100) / B3(1800) / B8(900) - 2G: B3(1800) / B8(900)	- LTE-FDD: B1(2100) / B3(1800) / B5(800) / B7(2600) / B8(900) / B20(800) / B28(700) - LTE-TDD: B3(2600) / B4(2300) / B4(2500) - 2G: B3(1800) / B8(900)	- LTE M1 & NB1: B3(1800) / B8(900) / B20(800) - LTE M1 UL/DL: 375/300 kbps - LTE NB1 UL/DL: 20-250/250 kbps		- LTE: B1(2100) / B2(1900) / B3(1800) / B4(1700) / B5(850) / B8(900) / B12(700) / B13(700) / B18(800) / B19(800) / B20(800) / B25(1900) / B26(850) / B27(800) / B28(700) / B66(1700) / B71(600) / B85(700) - LTE Cat.M: 1 Mbps/588 kbps - LTE Cat.NB: 160/120 kbps
	Speed (DL/UL)	- LTE Cat.1: 10/5 Mbps - HSPA+: 42 Mbps - GPRS: 80/40 kbps	- LTE Cat.1: 10/5 Mbps - GPRS: 80/40 kbps			- LTE Cat.M: 1 Mbps/588 kbps - LTE Cat.NB: 160/120 kbps - 2G (EGPRS): 210/264 kbps
	SIM card slot	mini SIM card (2FF type, push-insert SIM)				
	Antenna connector	External antenna connector (SMA, 50 Ohm)				
Compatibility	Meter type	Itron® SL7000 electricity meters				
Interfaces	Connectors	- RS232 or RS485 interface (RJ45, 1m long cable for meter connection / modem configuration) - AC pigtail connector, power supplied by meter(-57.7/100V phase voltage, 230/400V line voltage)				
	Protocol / Transmitting	EN 62056-21, Mode C - 300-115200 baud, auto., serial data speed "Pull" mode, transparent data sending "Push" mode (FTP or IEC sending, SMS triggered) CSDData call Optional TLS encryption				
Operation	Notification	Immediate alarm SMS notification (in case of power outage)				
	Configuration	WM-E Term® tool (local/mass parameter configuration, local/mass firmware updates) AT commands Device Manager software (order option)				
	Indication	3 status LEDs				
Environment	RTC Backup Battery*	Power outage < 1 hour After 1 hour the RTC will be supplied from the meter				
	Supercapacitor	Supercapacitor (for Last GASP SMS notification from power outages) - order option				
Construction	Operating / Storage	-40°C to +70°C at 95% rel.humidity -40°C to +70°C at 95% rel.humidity				
	Design	External modem, compact design (separated from meter)				
	Enclosure	Assembled into non-conductive plastic enclosure IP51 protection				
	Fastening	Fastened by the assembled Hammond 35mm DIN-rail adapter (anodized aluminum with spring steel wire, 1427DIN standard) for mounting				
Construction	Dimension / Weight	160 x 72 x 38mm (with DIN-rail adapter) 183g (with cabling)				



The presented images on the datasheet are for illustration purposes only. The details on the data sheet are for general information purposes only. WM Systems LLC cannot be held liable for erroneous information on the datasheet. The announced information are subject to change without notice. For more details, please contact us.

WM Systems LLC

8 Villa str., Budapest, H-1222 HUNGARY

Phone: +36 (1) 310 7075

Support: +36 (20) 333 1111

Our website: www.wmsystems.hu

Sales inquiry: intersales@wmsystems.hu

Support: support@wmsystems.hu